



### Description

Thermostatic shower column with built-in wax thermoelement, shower head, rail with slider hand shower bracket, hand shower and additional "JOY" hand shower. Connections of 1/2" and a distance of 150±15mm between them. It includes a non-return valve. The flow rate at 3 bar of the hand shower is 7,1 l/min and of the shower head 7,8 l/min.

### Finish




chrome  
100089199

### Certifications and quality characteristics



### Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Handshower (l/min) (±15%)	0	3.94	5.92	8.85	11.06	12.9	14.57
Flow - Spout (l/min) (±15%)	0	4.15	6.1	8.96	11.04	12.78	14.29

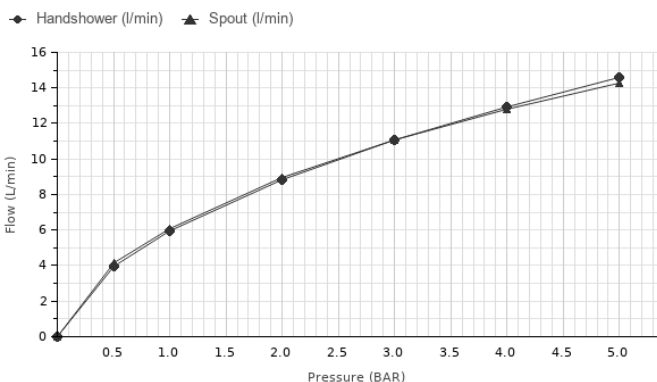

### Technical drawing

Dimensions in mm

