


Model: NOA-L TANZANIA ALMOND 59,6X59,6(A)

Codes: 100202114 - V55907441

Water absorption: Bla - Porcelanico (E<=0.1%)

Thickness: 7/16" approx.

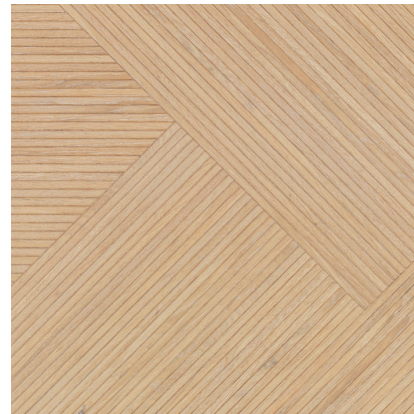

MATE / MATT



DETONIFICADO
TONE VARIATIONS



RECTIFICADO
RECTIFIED

DIMENSIONAL FEATURES

Length	23 7/16" approx	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*
Thickness	7/16" approx	+/-5%*
Width	23 7/16" approx	

MECHANICAL FEATURES

Abrasion resistance	3 - 600 Rev.	
Breaking strength	579.79 LBF	>250LBF*
Crazing resistance	Resists 3 cycles	
Modulus of rupture	11.18 LBF	>=8LBF*

HYGIENIC FEATURES

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	B Min.*
Stain resistance	Class 5. Easy cleaning with water	3 Min.*

SCOPE OF USE

Technical code-1	Use on medium traffic floors	
------------------	------------------------------	--

ANTI-SLIP VALUE

Slip resistance (dcof)	0,60	
------------------------	------	--

PACKING

Boxes	15.29 SQF/CS	
Pallets	489.41 SQF/PAL	
Units	3.82 SQF/ST	

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.