


Model: AMSTERDAM GREY SAND

Codes: 100203110 - L105005031

Group: G-279

Format: 40X80X1,5

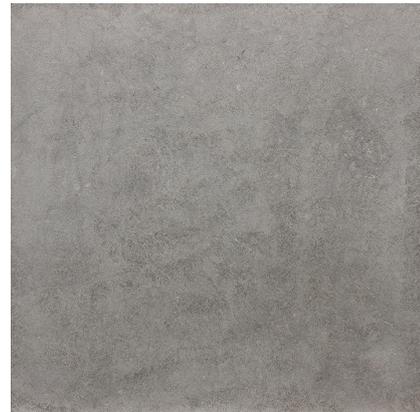

RECOMMENDATIONS

Recommended adhesive	100031188 SUPER-ONE N BLANCO	
Recommended adhesive (wet area)	100031188 SUPER-ONE N BLANCO	
Recommended joint	100236834 COLORSTUK RAPID GRIS N	
Recommended joint (wet area)	100236834 COLORSTUK RAPID GRIS N	100086920 FILA FOB EXTREME

ADDITIONAL NOTES

Does not allow for grouting

TOLERANCES

Indoor tolerance	1 mm (ancho), 1.5 mm (largo), ±10% (espesor)	UNE EN 1469*
------------------	--	--------------

LABORATORY TESTS

Bulk density	2621 Kg/m3	UNE EN 1936:2007*
Flammability	A1f l/A1	UNE-EN 13501-1:2007+A1:2010*
Flexural strength	13.6 MPa	UNE-EN 12372:2007*
Frost resistance	8.7 MPa	UNE-EN 12371:2011*
Resistance to abrasion (except g.7-8)	19.9 mm	UNE-EN 14157:2005*
Slip resistance	Húmedo: Clase 1/Seco: Clase 3	UNE EN 1423:2004*
Water absorption at atmospheric pressure	0.5%	UNE-EN 13755:2002*

FEATURES

-  Protection that reduces the appearance of the most common domestic bacteria.
-  There are considerable color changes between pieces.
-  Material from a European country.
-  Material suitable for use on indoor walls.
-  Gloss-free
-  Material suitable for use on outdoor walls.
-  Material suitable for use on shower walls.
-  Material suitable for use on indoor floors.
-  Material suitable for use on outdoor floors.

PACKING

Base unit	PIECES	
Boxes	0.32 M2/BOX	
Gross weight	39.5094 KG/M2	
Net weight	38.6281 KG/M2	
Pallets	24.96 M2/PAL	
Sale unit	M2	
Units	0.32 M2/PIECE	

