


Model: LINKFLOOR LEGEND LIGHT


Codes: 100246131

Group: G-227

Format: 22,8X180X0,55

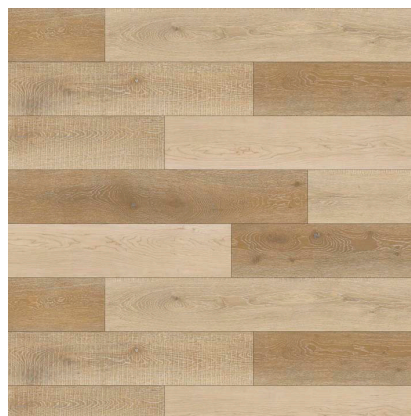

COMPOSITION



	Size	Material	Type of material
Layer 1	0.5	Wear layer	Use layer with PU protection
Layer 2	0.1	Vinyl	decorative film
Layer 3	0.7	Elastic PVC	Intermediate comfort layer
Layer 4	3.2	SPC	SPC composite body
Layer 5	IXPE	1	IXPE motherboard

CERTIFICATIONS


Floorscore certification


FLOORSCORE


ADDITIONAL NOTES

COMPOSITION: Engineered SPC Enhanced Resilient Multi-Layer Vinyl Plank / Tile

FEATURES


 Imitates the surface of wood


 Water-and-moisture resistant, suitable for wet areas such as bathrooms and kitchens


 25 year warranty for domestic use valid for vinyl materials that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with ISO 10582.


 Floor capable of dissipating excess electrical charges and distribute them over its entire surface

 There are considerable color changes between pieces.

 Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.

 10 year warranty for commercial use valid for vinyl materials that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with ISO 10582.

 Is suitable for installing on water radiant heating

 Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly.

DIMENSIONAL FEATURES

Squareness of the item (q)	0.07 %	ASTM F2199*
Straightness of face	0.13 %	ASTM F2199*



LABORATORY TESTS

Abrasion resistance	CLASE T	
Acoustic insulation	(6"): IIC=54 dB;STC=51 dB/(7"): IIC=59 dB;STC=54 dB/(8"): IIC=57 dB;STC=52dB/(OWT): IIC=57 dB;STC=61 dB	ASTM E492 ; ASTM E90**
Castor chair effect	No damage	
Commercial area class	33	EN 10582*
Dynamic coefficient of friction	≥0.42	ANSI 137.1*
Evaluation of propensity to accumulation of electrostatic charges	≤2 kV	EN 1815*
Fire resistance	Bfl-S1	EN 13501*
Flexibility	PASS %	EN 435*
Formaldehyde emissions	E1	EN 717-2*
Heat resistance	0.052 M2**K/W	EN 12667*
Impact resistance	PASS	EN 433*
Private area class	23	EN 10582*
Resistance to chemicals	PASS	ASTM F925*
Slip resistance (cls)	Húmedo: Clase 2/Seco: Clase 3	UNE-ENV 12633*
Slip resistance (r)	R-10	DIN 51130*
Thermal conductivity	0.108 W/M**K	EN 12667*
Uv light fastness	>Grado 6	ISO 105-B02*

PACKING

Base unit	PIECES	
Boxes	2.4624 M2/BOX	
Gross weight	10.2924 KG/M2	
Net weight	9.9415 KG/M2	
Pallets	137.8944 M2/PAL	
Sale unit	M2	
Square meters	1 M2	
Units	0.4104 M2/PIECE	

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100174756	ESP. PERF ADH LINKFLOOR ALUMINIO 3,5X270	G-121	10 PIECES/BOX	1000 PIECES/PAL	10.58 PIECES/M2	PIECES	PIECES	0.37 KG/PIECES	0.39 KG/PIECES
100264838	MAMPER LINKFLOOR LEGEND LIGHT 120X7	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	PIECES	PIECES	1.58 KG/PIECES	1.64 KG/PIECES
100128267	ZOCALO ALUMINIO 8X225	G-121	12 PIECES/BOX	696 PIECES/PAL	5.56 PIECES/M2	PIECES	PIECES	1.57 KG/PIECES	1.62 KG/PIECES

