


Model: CRAFT GREY

Codes: 100272930 - L138001731

Group: G-226

Format: 14,7X14,7X0,8

Thickness range: 2,22%, 0,2mm / 3,33%, 0,3mm -

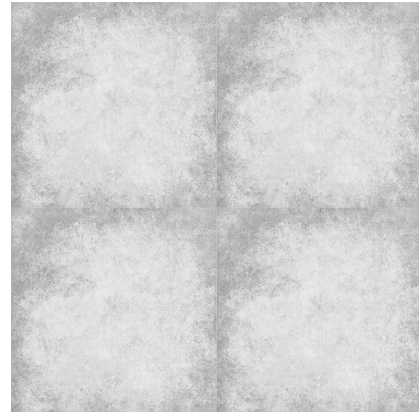

RECOMMENDATIONS

Recommended adhesive	100201526 ONE-FLEX PREMIUM BLANCO
Recommended adhesive (wet area)	100201526 ONE-FLEX PREMIUM BLANCO
Recommended joint	100236806 COLORSTUK GRIS N
Recommended joint (wet area)	100236806 COLORSTUK GRIS N

DIMENSIONAL FEATURES

Length and width deviation	±0.6%	UNE EN 14411*
Orthogonality deviation	±0.6%	UNE EN 14411*

FEATURES



Gloss-free



Material suitable for use on shower walls.



Material suitable for use on outdoor walls.



Material suitable for use on indoor floors.



Material suitable for use on indoor walls.



There are considerable color changes between pieces.

PHYSICAL PROPERTIES

Breaking strength	2390 N	>1300N*
Coefficient of linear thermal expansion	5.7 1/(10E6**K)	ISO-10545-8*
Crack resistance	PASS	ISO 10545-11*
Dynamic coefficient of friction	>0,50	
Flammability	A1f I/A1	EN 13501-1:2007+A1:2010*
Flexural strength	45 MPA	ISO 10545-4*
Resistance to thermal shock	PASS	ISO 10545-9*
Slip resistance (pendulum-wet)	CL1	
Slip resistance (ramp)	R-9	
Water absorption	Bla	UNE-EN-ISO-10545-3*

CHEMICAL PROPERTIES

Resistance to chemicals	A/LA	ISO 10545-13*
Stain resistance	Clase 5	ISO 10545-14*

PACKING

Base unit	PIECES
Boxes	0.9504 M2/BOX
Gross weight	19.213 KG/M2
Net weight	18.8889 KG/M2
Pallets	71.28 M2/PAL
Sale unit	M2
Units	0.0216 M2/PIECE

