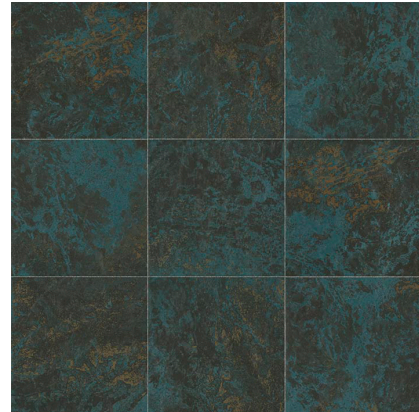


Model: BALI KUTA

Codes: 100301814 - L138002411

Group: G-226

Format: 14,8X14,8X0,9

Thickness range: $\pm 0,5$ mm






RECOMMENDATIONS

Recommended adhesive	100201526 ONE-FLEX PREMIUM BLANCO
Recommended adhesive (wet area)	100201526 ONE-FLEX PREMIUM BLANCO
Recommended joint	100236834 COLORSTUK RAPID GRIS N
Recommended joint (wet area)	100236834 COLORSTUK RAPID GRIS N

DIMENSIONAL FEATURES

Length and width deviation	$\pm 0.6\%$	UNE EN 14411*
Orthogonality deviation	$\pm 0.5\%$	UNE EN 14411*

FEATURES

-  Material with surface with the ability to produce reflections.
-  Material suitable for use on shower walls.
-  Material suitable for use on outdoor walls.
-  Material suitable for use on indoor walls.
-  There are considerable color changes between pieces.

ADDITIONAL NOTES

For installation in swimming pools, follow the installation and maintenance instructions, as well as the instructions of the manufacturer of the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications you must waterproof the substrate, install a minimum joint of 5 mm, and also install expansion joints. In accordance with the requirements of the Spanish Technical Building Code (CTE), this ceramic tile model cannot be installed in areas intended for barefoot users and at the bottom of pool vessels, in areas where the dept

PHYSICAL PROPERTIES

Breaking strength	≥ 1300 N	> 1300 N*
Coefficient of linear thermal expansion	≤ 9 1/(10E6**K)	ISO 10545-8*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 14411:2016*
Flexural strength	≥ 35 MPA	ISO 10545-4*
Resistance to thermal shock	PASS	ISO 10545-9*
Slip resistance (pendulum-dry)	CL3	
Slip resistance (pendulum-wet)	CL0	
Water absorption	Bla	UNE-EN-ISO-10545-3*

PACKING

Base unit	PIECES	
Boxes	0.495 M2/BOX	
Gross weight	20.5333 KG/M2	
Net weight	19.8222 KG/M2	
Pallets	59.4 M2/PAL	
Sale unit	M2	
Units	0.0225 M2/PIECE	

CHEMICAL PROPERTIES

Resistance to chemicals	GA/GLA/GHA	UNE-EN ISO 10545-13*
Stain resistance	CL5	ISO 10545-14*

